

# THREE CORE MV CABLES TYPE XKDT-F

---

**Rated voltages :** 10 kV / 20 kV / 30 kV


**Conductor cross-sections :** 50 / 95 / 150 / 240 mm<sup>2</sup>

*For rated voltages 10 kV and 30 kV and / or other conductor cross-sections, please contact us*

*Halogen free execution and flame retardend sheath material + filler on request..*

## CONSTRUCTION

- 1 for the construction details of the single core cable see family XKDT
- 2 assembly of 3 single core cables
- 3 extruded filler
- 4 galvanized flat steel wire pulling armour

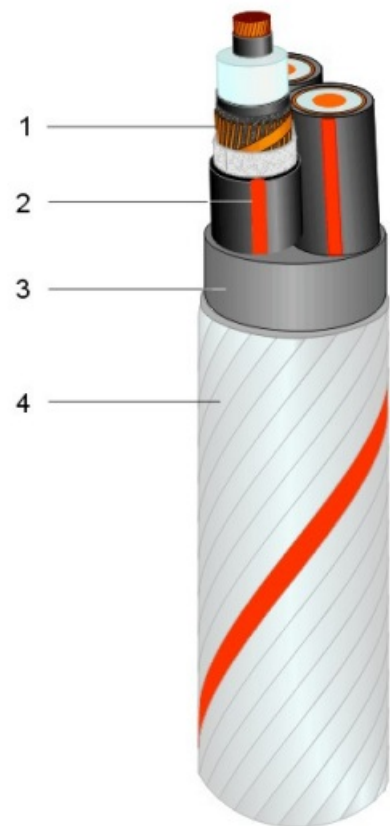

## Max. admissible operating temperatures :

in permanent service : 90° C

in emergency service , max. 8 h / day- 100 h / year : 110° C

in case of short-circuit : 250° C